


#1596 Colosseum Fountain-Small

Items Required For Assembly

120 GPH Pump	(not provided)
Rubber Stopper	(provided)
Copper Elbow w/Vinyl Tubing	(provided)
Silicone Sealer	(not provided)

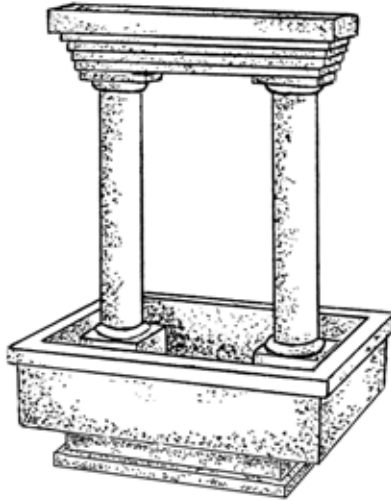

- 1) Place base (A) on a firm, level surface. Lift up one side of the base approximately 3" by placing some wood under the base.
- 2) Place bowl (B) onto the base (A) so that the base is centered under the bowl.
- 3) Place pump in the bottom of the bowl (B). Pass the electrical cord of the pump through the PVC coupling at the bottom of the bowl, through the base, and out the bottom of the base where the groove is located.
- 4) Remove the wood holding up the base (A) and gently lower the base to the ground.
- 5) Pull the electrical cord of the pump out the bottom of the base so that approximately 6" remains inside the bowl (B).
- 6) Take the rubber stopper and apply silicone sealer in the center hole. Open the stopper and place around the electrical cord. Apply silicone sealer around the outside and along the inner cut of the stopper and insert fully in to the PVC coupling at the bottom of the bowl.

- 7) Pour a small amount of water into the bowl (B) so that the rubber stopper is submerged. Check to make sure that the water is not leaking through the rubber stopper. If you find water is leaking, remove the rubber stopper and return to step 6.
- 8) Place the tower (C) into the bowl (B) so that it sits between the support flanges opposite the pump.
- 9) Place the plumbed tower (D) into the bowl (B) so that it sits between the support flanges and over the pump. Make sure the access cutout is facing towards the center of the bowl.
- 10) Place the top trough (F) onto the tops of the two towers so that the PVC pipes extending from the tops of the towers fit into the holes at the bottom of the trough. Make sure that the side inner wall that has the horizontal pipe cast into it is on the same side as the plumbed tower (D).
- 11) Slide the vinyl tubing through the plumbed tower (D) from the top so that it extends down to the pump. Attach one end of the vinyl tubing to the horizontal pipe cast into the side inner wall of the trough (F).
- 12) Through the access cutout of the plumbed tower (D), attach the other end of the vinyl tubing to the outlet of the pump. Make sure that the vinyl tubing is not kinked as this will restrict water flow. You may cut the tubing to size if necessary.
- 13) Place the diffuser cap (G) into the inner part of the trough (F) so that it covers the water outlet.
- 14) Fill the bowl (B) with clean water so that the pump is completely submerged.
- 15) Plug the pump into a GFCI protected outlet.
- 16) Adjust the water flow of the pump if necessary using the flow control dial on the pump.
- 17) Place the access door (E) into the access cutout of the plumbed tower (D) and enjoy your new fountain.

