


#3502 Frog Falls Fountain

Items Required For Assembly

170 GPH Pump (not provided)

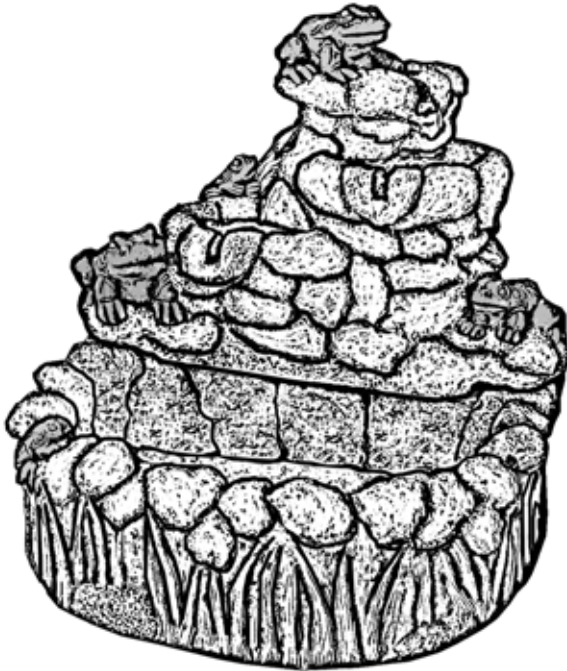

- 1) Place the bowl (A) on a firm, level surface.
- 2) Place the pump in the rear pumphouse cavity of the bowl (A).
Drape the electrical cord of the pump over the rear rim of the bowl.
- 3) Place the frog falls fountain top (C) onto the rear portion of the bowl (A).
- 4) Through the access area under the rock falls fountain top (C), attach the vinyl tubing that protrudes from the bottom of the frog falls fountain top to the outlet of the pump. Make sure that the tubing is not kinked so as to restrict water flow. You may cut the vinyl tubing if necessary.
- 5) Place the diffuser cap (D) over the water outlet in the top bowl of the frog falls fountain top.
- 6) Fill the bowl (A) with water so that the pump is completely submerged.
- 7) Plug the pump into a GFCI protected outlet.
- 8) Place the access door (B) in opening under the frog falls fountain top and enjoy your fountain.

