


Provence Tower Style Fountain

These are generic assembly instructions for all styles of Provence Tower Style Fountains.
The actual styling of your fountain may differ from the one shown.

Items Required For Assembly

Submersible Pump	(not provided)
Vinyl Tubing	(provided)
Rubber Stopper(s)	(provided)
Silicone Sealer	(not provided)

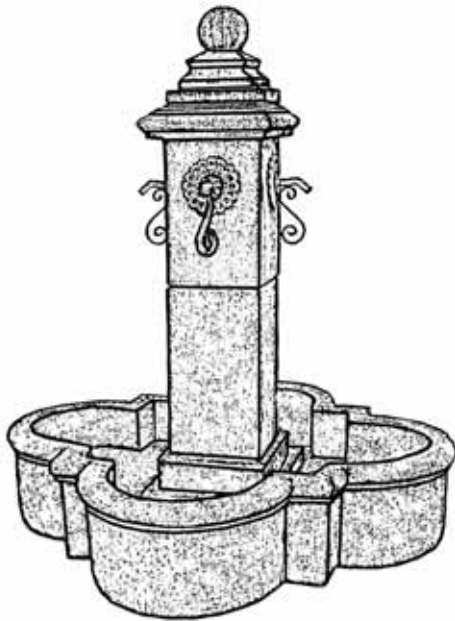

- 1) Place bowl (A) on a firm, level surface .
- 2) Carefully place the pumphouse(B) into the center of the bowl (A). Make sure that the opening at bottom of tower (B) is facing towards the PVC coupling cast into the side wall of the bowl.
- 3) Place the pump inside the pumphouse (B) so that it is lying on the bottom of the bowl (A) with the outlet facing up. Pull the electrical cord through the PVC coupling cast into the side wall of the bowl.
- 4) Carefully place the lower tower section (D) onto the pumphouse (B).
- 5) Slip one end of the vinyl tubing over the hose barb coming out of the bottom of the upper tower section (E).
- 6) Place the upper tower section (E) onto the lower tower section (D).
DO NOT PICK UP THE TOWER SECTION USING THE IRON SPOUTS!
Make sure that the vinyl tubing extends through the lower tower section (D) down into the pumphouse (B) where the pump is. Through the access cutout, attach the 1/2" ID vinyl tubing to the outlet of the pump. Make sure that the tubing is not kinked so as to restrict water flow. You may cut the vinyl tubing if necessary.

- 7) Place the diffuser cap (G) over the water outlet at the bottom of the upper tower section. This will serve to smooth out the water flow.
- 8) Place the finial (F) onto the upper tower section (E).
- 9) Take the rubber stopper and apply silicone sealer in the center hole. Open the stopper and place around the electrical cord. Apply silicone sealer around the outside and along the inner cut of the stopper and insert fully into the PVC coupling in the side wall of the bowl.
- 10) If your fountain has a drainage hole on the bottom of the large bowl, apply silicone sealer around the outside and along the inner cut and hole of the second rubber stopper and insert fully into the PVC coupling on the bottom of the bowl.
- 11) Fill the bowl (A) with water so that the pump is completely submerged.
- 12) Plug the pump into a GFCI protected outlet.
- 13) Adjust the water flow using the flow control dial on the pump.
- 14) Place the access door (C) into the cutout of the lower tower section (B).
- 15) Place the cord cover (G) between the access door (C) and the inside side wall of the bowl so that the cord is covered and not noticeable. Enjoy your new fountain.

